





©2024 Relax The Back. Patents and intellectual property rights enforced. HALE ZG-NA-A1



RELAX THE BACK°



1. Unfold the backrest frame (Fig.1).

UNPACK THE BOXES

Confirm that you have all of the following parts:



Chair



Body pad

2. Insert the "L" latches into both sides of the frame to secure (Fig.2).

"L" latch



Pillow



Power adapter

3. Unfold the rear fabric cover over the "L" latches and press firmly to connect the hook-and-loop fasteners (Fig.3)

Hook-and-loop fasteners

ASSEMBLY



(Fig.1)



(Fig.2)



(Fig.3)

4. Connect the power adaptor to the chair, then plug into a wall outlet (Fig.4).



(Fig.4)

7. Unzip the seat fabric cover (Fig.7).

8. Pull the air hoses and heater wire harness through the hole in the seat fabric cover (Fig.8).

Air hoses and heater

5. Turn the dial clockwise or use the remote to raise the legrest (Fig.5).



(Fig.5)


6. Attach the legrest portion of the body pad onto the frame (Fig.6).

4




(Fig.6)

9. Connect the air hose harness and heater wire making sure they are under the seat spring, then zip the seat cover to close (Fig.9).

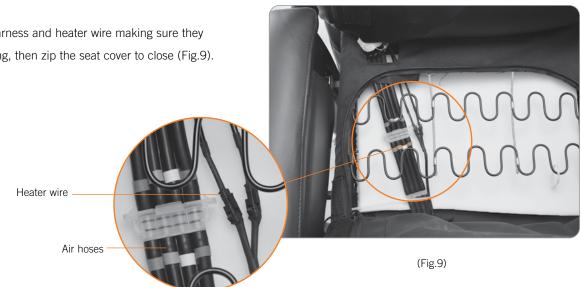




(Fig.7)

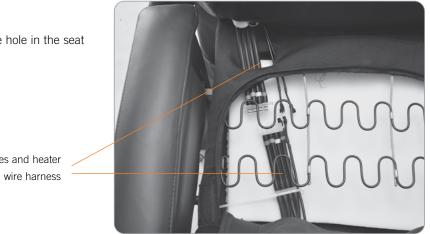

(Fig.8)

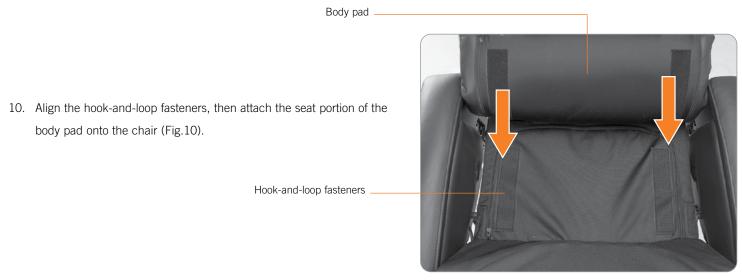



13. Zip the body pad over the backrest frame (Fig.13).

of the body pad (Fig.14).



11. Unzip the rear cover of the body pad (Fig.11).

Back pad

body pad onto the chair (Fig.10).

(Fig.11)

15. Hang the remote control onto the hook (Fig.15).



12. Slide the headrest portion of the body pad onto the top of the backrest frame (Fig.12).



(Fig.13)